

Pandora's Box Arcade Version Quick User Manual



JAMMA

Dear customer:

Thank you for choosing and using the Pandora's Box Arcade Version. Hope you can better use the product, please read carefully the user manual. Let it bring you a better game experience.

Jamma Pin:

2P TABLE (SOLDER SIDE)		1P TABLE (PARTS SIDE)	
GROUND	A	1	GROUND
GROUND	B	2	GROUND
+5V	C	3	+5V
+5V	D	4	+5V
N/C	E	5	N/C
+12V	F	6	+12V
N/C	H	7	N/C
N/C	J	8	N/C
N/C	K	9	N/C
SPEAKE-	L	10	SPEAKE+
N/C	M	11	N/C
VIDEO GREEN	N	12	VEDIO REN
VEDIO SYNC	P	13	VEDIO BLUE
N/C	R	14	GROUND
N/C	S	15	N/C
PAUSE	T	16	COIN SWITCH #1
2P START	U	17	1P START
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P BUTTON #1	Z	22	1P BUTTON #1
2P BUTTON #2	A	23	1P BUTTON #2
2P BUTTON #3	B	24	1P BUTTON #3
2P BUTTON #4	C	25	1P BUTTON #4
2P BUTTON #5	D	26	1P BUTTON #5
2P BUTTON #6	E	27	1P BUTTON #6
GROUND	F	28	GROUND

Interface Definition:



Volume Adjusts the overall output volume, including the JAMMA output, HDMI output and 3.5mm audio output volume, so to avoid repeated output, you can choose a separate sound output. Please insert the USB storage device before use.

Product Features:

- * The "Pandora's Box Arcade Stick (PBAS) " comes with classic Retro Multiple Arcade Games. We have managed to bring these games after a number of hardware and software technology developments through our rich experience to match the expectations of the high level of enthusiasts players .
- * PBAS has high quality optimization with open function in order to adapt to the requirements of high-definition display era.
- * Supports Game Classification Function which is convenient for players to find games according to the Genre of Game (such as fighting Genre) OR Game Name (such as the name of the game beginning with A letter). The same type of game can be arranged in a unified manner.
- * Supports Multi-Language (Simplified Chinese / Traditional Chinese / English)
- * Supports high-quality two-channel HDMI/AUX audio output
- * Supports Turbo Shooting function which enables you to enjoy the ultimate pleasure continuous shooting function
- * Supports Game-Pause function even in Coin Mode which enables you to Pause /Resume your game play.
- * Supports Unlimited Games feature on an External Storage Media so that players can easily add their own games of FBA/MAME/PS1.
- * Support Replace background image function, highlight your personality and create your own game world
- * Support Custom Button, The position of the button can be defined according to your needs.

Game classification function:


This product features a new Game Classification Function, which greatly facilitates the player to search for the game that he wants to play and at the same time quickly displays the same Genre of Game. Press the 1P Start button in the main menu of the game to enter the Game Classification interface. There are 2 classification methods: 1. depending on the Genre of the game and 2. sorting according to the letter of the Game Title. The Genre of Games are divided into FIVE categories: [Fighting], [Action], [Shooting], [Sports], and [Puzzle]. Each Genre of game has its own icon that appears above the sequence number in the default sort. Press A to choose to return to the Main Menu and the Game List will show the first game of the selected type.



Move Joystick to the Right in the interface to enter the alphabet sorting selection, press A to select one of the letters, then after return to the main menu the game list will be displayed the first game of the letter(Picture 10) , If you want to return to the default list, press the D button on the category interface.

Switch display resolution:

In order to meet the needs of more players, this product exclusively supports 4 display resolutions: 1280x720, 1024x768, 640x480, 384x224 (CRT 15KHz). The default output is 1280x720.

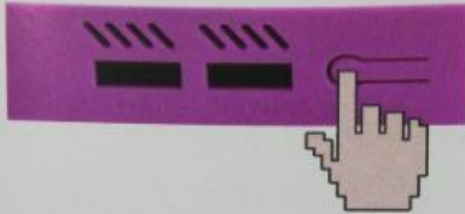

Please press and hold the Setting Button and THEN turn ON the power and just after 2 seconds release the Setting Button in order to switch to next resolution.



Two LED states match 4 resolutions.



Turbo shooting function:

In the game, hold down the START button and press A to turn ON/OFF auto fire, After open please hold down A button keep auto fire.



game expansion function:

The games supported by the motherboard itself are rigorously tested and run normally, and users can add their favorite games to the external storage device. Support for FBA/MAME/PS1 simulator games. According to the simulator, the user copies the game ROMS file to the [roms_fba], [roms_mame], and [roms_playstation] folders in the root directory of the external storage device. The homemade MV files are placed in the [movies] folder. Reboot to scan out the newly added game and place it at the end of the list.



roms_fba



roms_mame



roms_playstation

Replace background image function:

In order to highlight the personality, you can use your favorite background image. You only need to pass the image file through PS and other image processing software, and output it as 4 kinds of BMP images. The image files at each resolution are independent, so you need to output 4 files. The file must be in Bmp format, the file name: 1280x720.bmp; 1024x768.bmp; 640x480.bmp; 384x224.bmp; Then copy the 3 files to the root directory of the Usb storage device.



384x224. bmp



640x480. bmp



1024x768. bmp



1280x720. bmp

Abnormal Condition Diagnosis of Using:

Error Description	Reason	Approach
No respond when power on, without power light.	Power adaptor is abnormal Console is abnormal	Try to replace the power adaptor with the same parameters or contact to the dealer.
No signal	Please check whether the connection of HDMI or VGA is correct, the monitor source settings are correct	Replace wiring harness or monitor.
No Sound	Circuit abnormal	Change wiring harness or audio equipment

* (Please prevail the product in kind, if there are new changes or upgrades of it; please forgive me without prior notice) For your health, please moderate the game. Do not watch the monitor / TV for a long time in a dark environment, and rest for 5 minutes every half hour. Thank you for buying and using this product, wish you a happy hours.